Specification

Vormatic 75" LCD Ultra Slim Display
напольный уличный



vormatic®
electronics

LCD SERIES

Floor stand series

75” Ultra HD High Brightness 3000 Nits Digital Signage



SUNLIGHT VIEWABLE IMAGE

2K UHD RESOLUTION

BUILT-IN MEDIA PLAYER

THERMAL MANAGEMENT

TRUECOLOR™ CALIBRATED


Copyright © The Limited Liability VORMATIC

PRODUCT PARAMETER

MODEL	750SLZJ-A	
PANEL	LCD Panel Size	75 inch
	Native Resolution	3840×2160
	Brightness	3000 nits
	Color Depth	16.7M
	Contrast Ratio	1200:1
	Response Time (Typ.)	8s
	Viewing Angle	178/178
	Light Lifetime (Typ.)	50000 Hours
	Viewable With Polarized Lenses	Yes
POWER	Power Supply	AC 100-240V 50/60Hz
	Rated Voltage	AC 110V/230V
	Power Consumption (Max.)	550W
	Power Saving Mode	≤0.5W
	AC Out	N/A
MECHANICAL SPECS	Bezel Width (T/B/L/R) mm	20/20/20/20
	Protection Glass	Yes (6T Tempered Glass IK10)
	Cabinet Color	Default Black
	Product Dimensions (LxHxD) mm	970.0×2400.0×150.0
	Monitor Weight	90kg
	Orientation	Portrait
	VESA Mounting (LxH) mm	N/A
	Carrying Handles	Yes
FEATURE	Language	Default English
	Support SNMP (Up to V3.0)	N/A
	Image Retention Protection	Yes
	Auto Orientation Sensor	N/A
	Ambient Light Sensor	N/A
	Power On/Off Scheduling	Yes
	OSD Menu Rotation	Yes
INPUT	HDMI 2.0(HDCP 2.3)	HDMI input 4K 30/60Hz
	DisplayPort 1.2	DP input 4K 60Hz
	USB 3.0	USB 3.0×2
	Micro SD Slot	Supports up to 32GB
OUTPUT	Audio	Stereo Mini Jack
ENVIRONMENT	Operating Temperature.	-10°C~ 45°C
	Storage Temperature	-30°C~70°C
	Humidity	10-95%(Non-condensing)
	IP Rate	IP66
INTERNAL PLAYER	Operating System	Android 11.0 or above
	Processor	Quad-core Cortex-A55
	Clock Speed	Up to 2.0GHz
	Main Memory Interface	2GB LPDDR4 1.5GHz 64bit
	Grapics	Supports OpenGL ES
	Storage	16GB
	Multimedia	4KP60 H.265/H.264/VP9 video decoder 1080P60 H.264/H.265 video encode
	Wireless Function	Wi-Fi 2.4/5.0GHz 802.11 a/b/g/n/ac/ax
CERTIFICATION	CE/RoHS/FCC	

Copyright © The Limited Liability VORMATIC

APPEARANCE SIZE

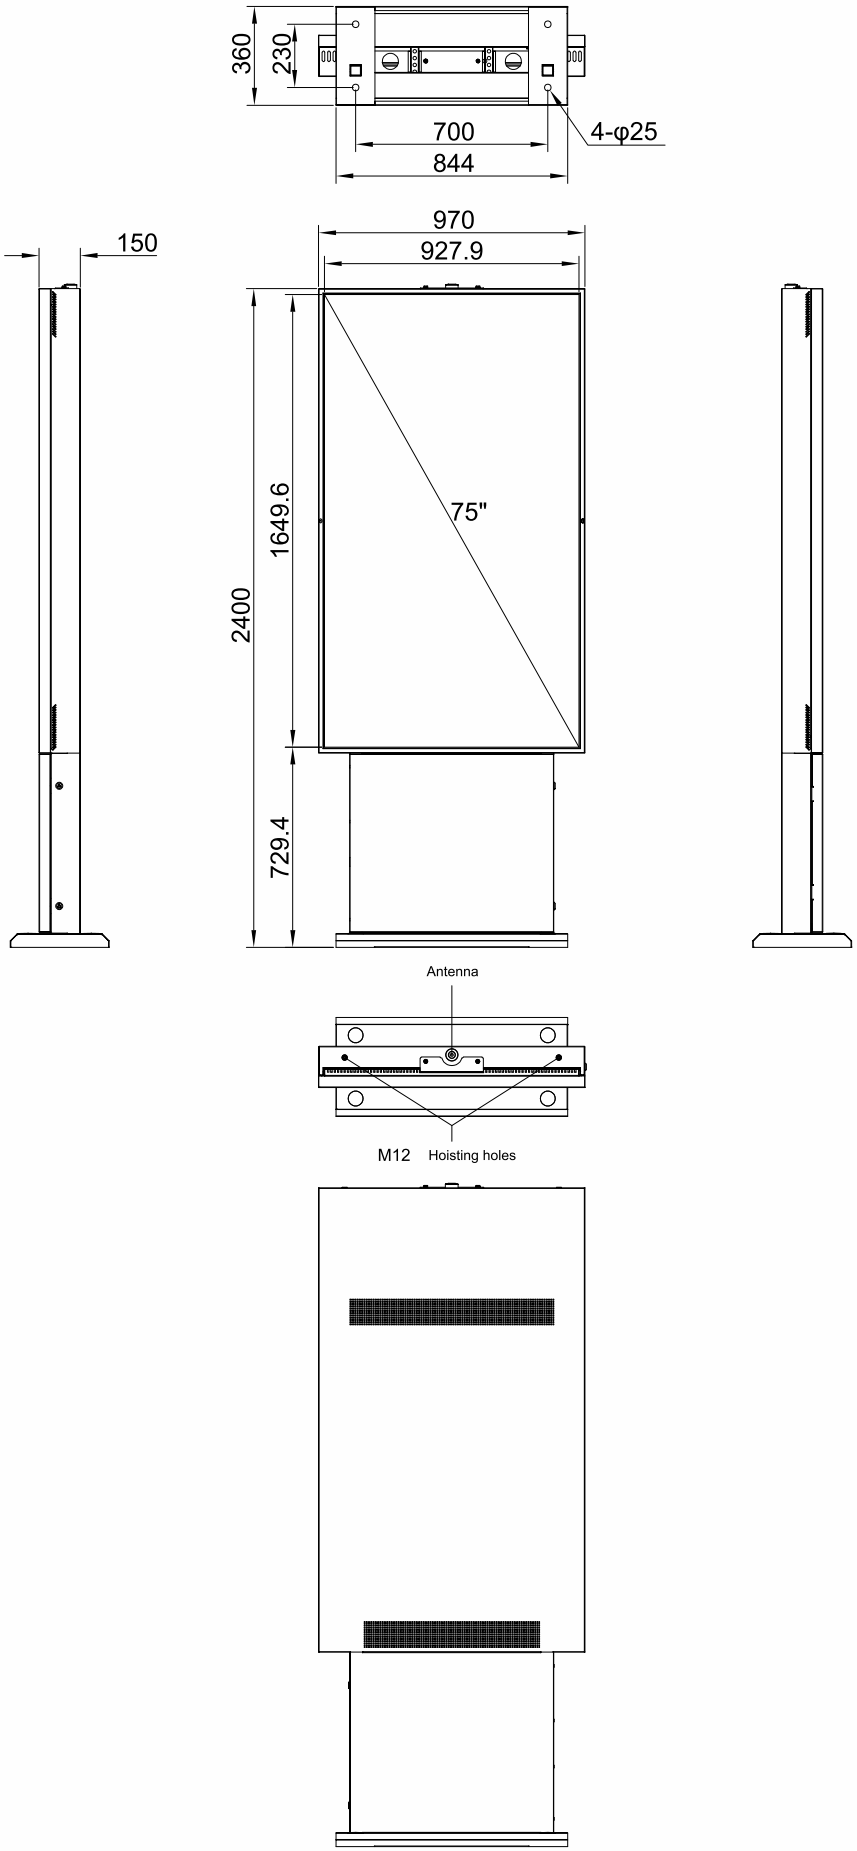

Copyright © The Limited Liability VORMATIC